

"High Frequency Ceramic Solutions"

2.4 GHz Low Pass Filter

P/N 2442LP18A083

Detail Specification: 08/15/11

Page 1 of 2


General Specifications

Part Number	2442LP18A083
Frequency (MHz)	2400 - 2483
Insertion Loss	0.6 dB max.
Return Loss	10.9 dB min.
Attenuation (min.)	30 dB @ 2 x fo
Attenuation (min.)	18 dB @ 3 x fo

Impedance	50 Ω
Input Power	3 Watt max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity: 45-75%RH, 18 mos. Max
Reel Quantity	3000


P/N Suffix	Packaging	Bulk	Suffix = S	Eg. 2442LP18A083S
	Style	T & R	Suffix = E	Eg. 2442LP18A083E
	Termination Style	100% Tin	Suffix = None	Eg. 2442LP18A083(E or S)
	Evaluation Board	2442LP18A083-EBSMA (2-Port SMA EVB)		

Terminal Configuration	
No.	Function
1	I/O
2	I/O
3	GND
4	GND



Mechanical Dimensions

	In	mm
L	0.126 ± 0.012	3.20 ± 0.30
W	0.063 ± 0.012	1.60 ± 0.30
T	0.039 ± 0.008	1.00 ± 0.20
a	0.031 ± 0.012	0.80 ± 0.30
b	0.020 ± 0.012	0.50 ± 0.30

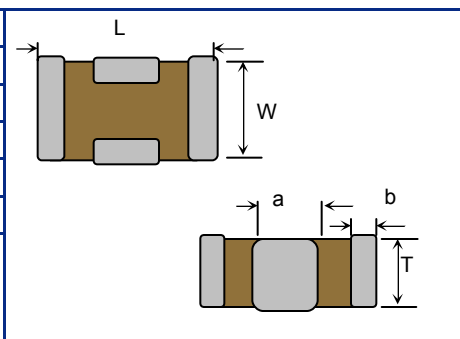


Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mm

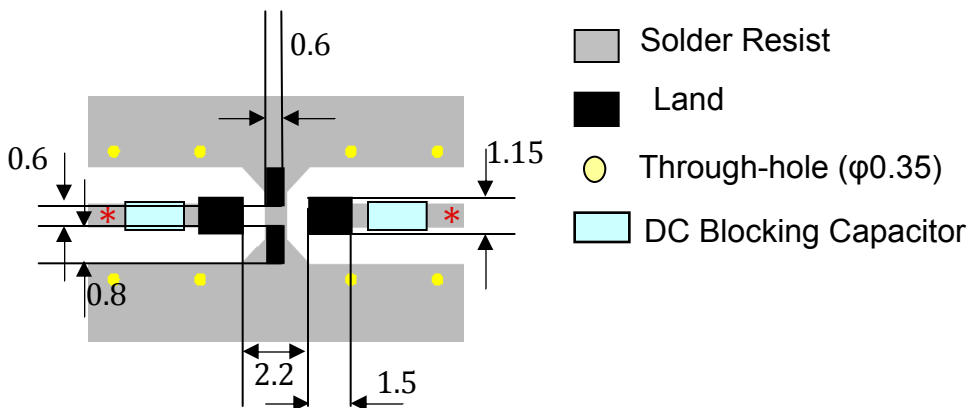

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.4 GHz Low Pass Filter

P/N 2442LP18A083

Detail Specification: 08/15/11

Page 2 of 2

Typical Electrical Performance (T=25°C)

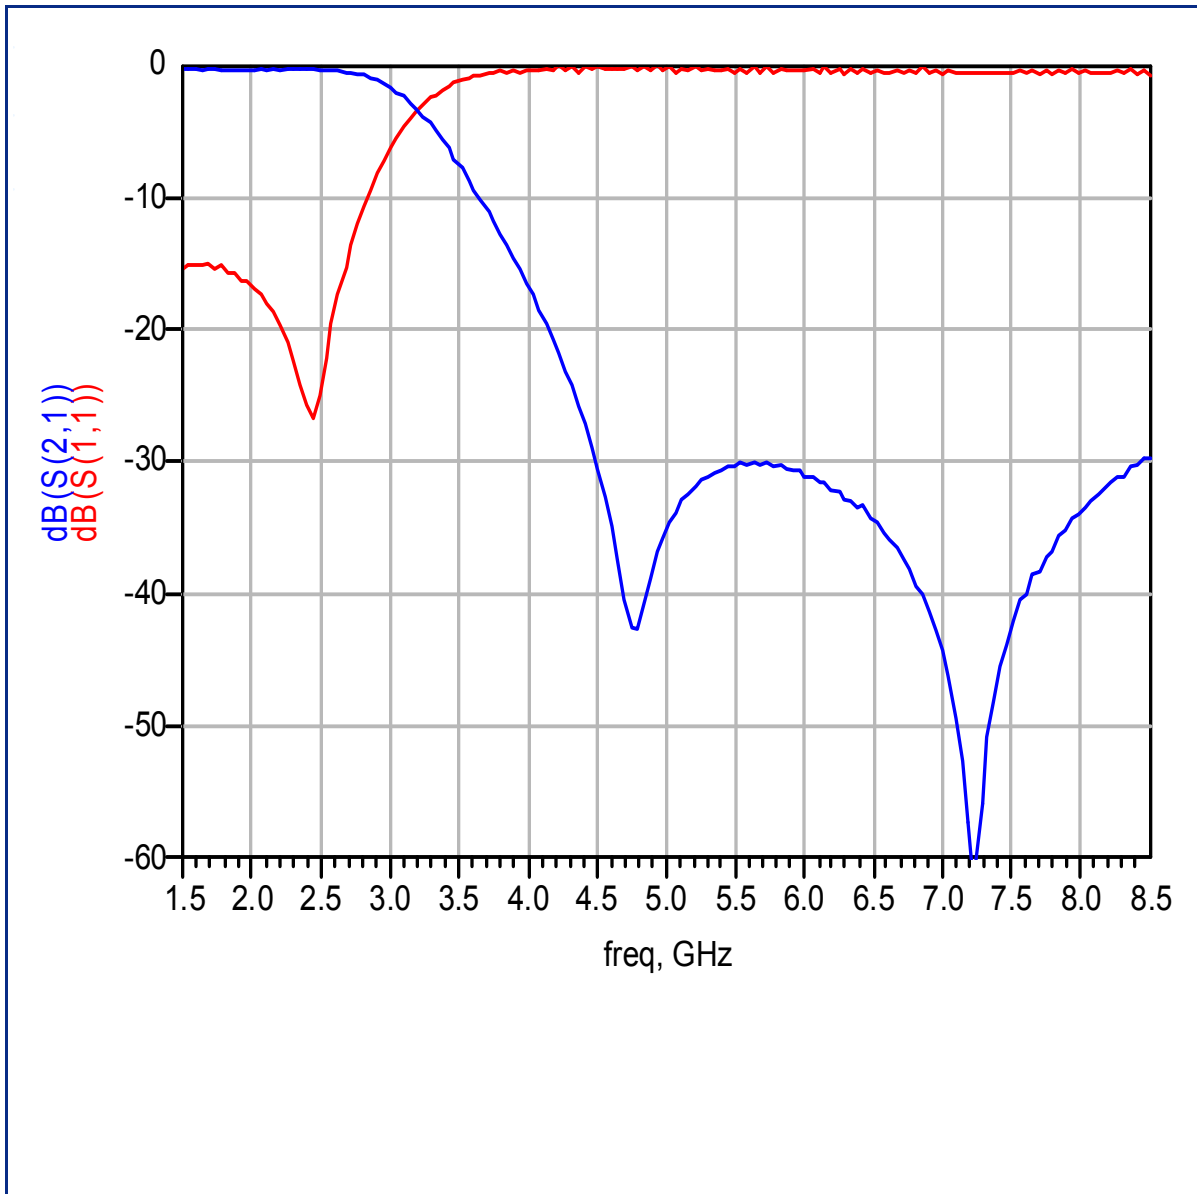

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2011 Johanson Technology, Inc. All Rights Reserved