

1 2 3 4 5 6 7

A

A

**Specification:**




**1. Electrical Char**

Insulation Resistance: 500M $\Omega$  min. 500V DC for 1 minute  
 Contact Resistance: 30m $\Omega$  max.  
 Rating Current: 1.5A max.  
 Rating Voltage: 120V AC  
 Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.

**2. Physical Char**

Housing: PBT Glass filled (UL 94V-0) Color: Black  
 Soldering Temperature: 235 $^{\circ}$ C for 5 sec.  
 Spring Wire: 0.35mm thickness Phosphor Bronze  
 6u" Gold on contact area over 50u" Nickel  
 Temperature Range: -40 $^{\circ}$ C to +85 $^{\circ}$ C  
 Durability: 750 mating cycles min.

**3. Packing: Tray**

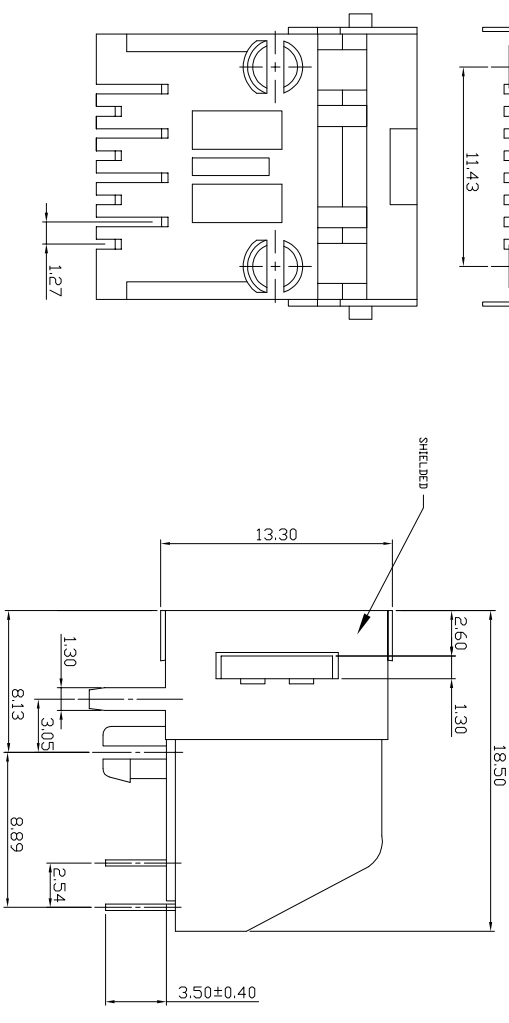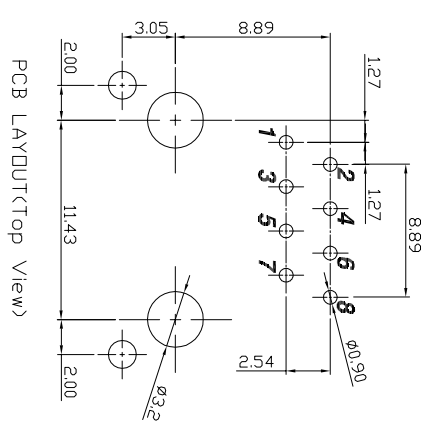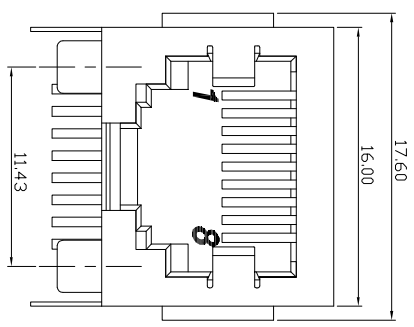

D

D

E

E

F

F

**RoHS compliant**  
Unit:mm

G

G

Scale	Free							
TOLERANCE								
.XX	±0.20					Drawn	21.07.2017	Winnie
.XXX	±0.13					Approved	21.07.2017	Winnie
.XXXX	±0.05							
DIM	TOL							
Angle	+0 $^{\circ}$ 30'	Id.		Drawn	21.07.2016	Winnie		
				Modification				

H

H

**ASSMANN**  
components

Customer-No.  
ASSMANN WSW-No.  
A-2004-2-4-LPS-R  
Drawing-No.  
ASS 7322 CO  
rev00  
SHEET

1 2 3 4 5 6 7