


NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 8.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.05 + 0.008f(GHz) MAX.

2.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

 MARKING:
MARK UNIT WITH INKSTAMP INK-09035-27-22.

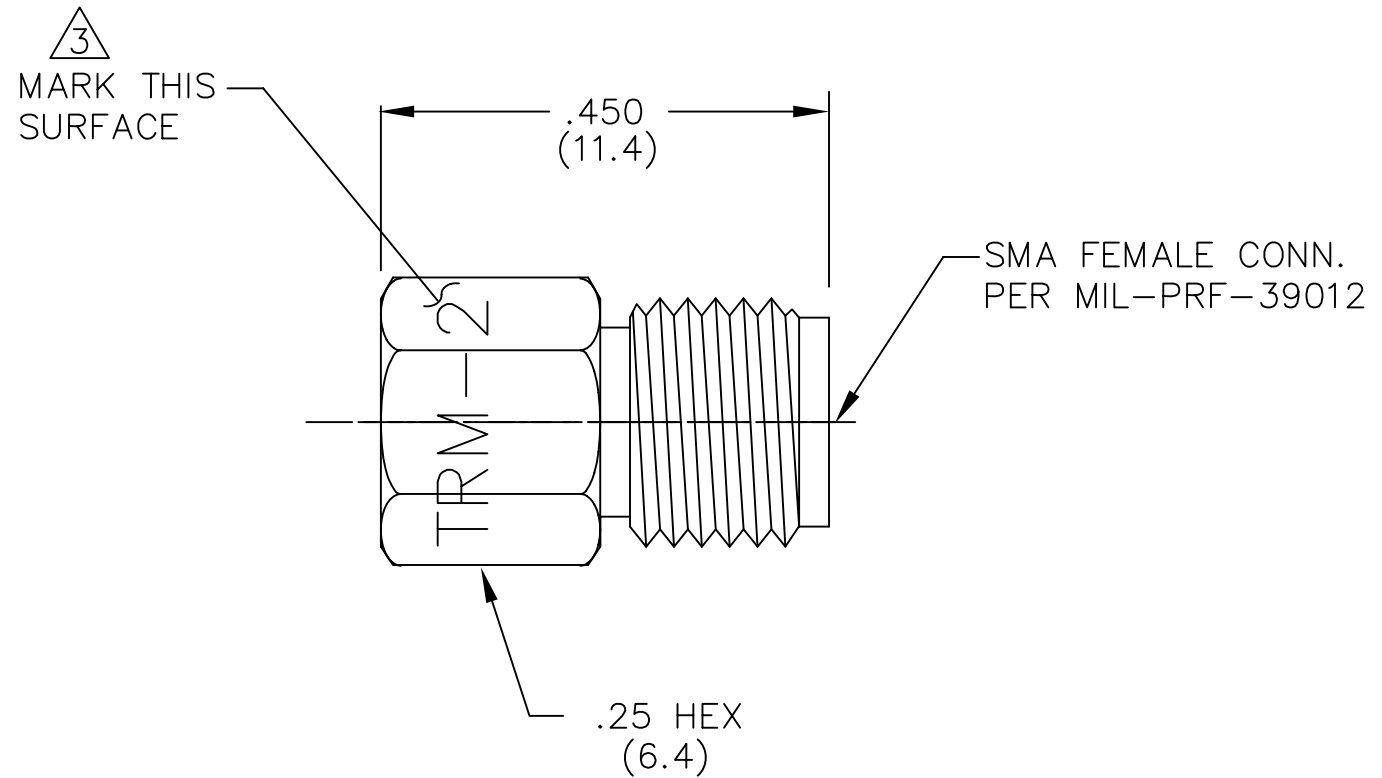

MODEL NUMBER
TRM-2446-FO-SMA-02
REV.
B

REV.	DESCRIPTION	DATE
-	RELEASED	3/8/93
A	ECN 15059	2/1/96
B	ECN 18767	10/9/02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION	
DRAWN/DATE A.BEATTY 3/3/93	ENG./DATE G.KOZAK 3/5/93	DRAWING NUMBER TRM-2446-FO-SMA-02	
CHECKED/DATE M.HOLLMAN 3/4/93	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1